



New

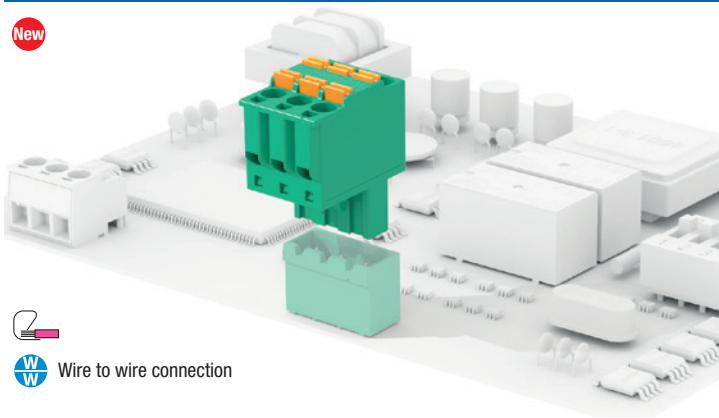

General data

Dimensional class:	medium
Standard colour:	green
Pitches:	metric 5 mm, 10 mm (.197 in, .394 in)
Stripping length:	10 mm (.39 in)
Operating temperature range:	-40 °C ÷ +105 °C (-40 °F ÷ +221 °F)
Contact resistance:	<15 mΩ
Insulation resistance:	>10 ⁹ Ω (500V DC)
Insulating material group:	I (CTI ≥ 600V)

Data according to

UL 1059

300 V - 12 A - 30÷12 AWG stranded for 5 mm (.197 in) pitch
600 V - 12 A - 30÷12 AWG stranded for 10 mm (.394 in) pitch


IEC EN 61984

300 V - 12 A - 4kV - 2 - T110 - 2.5 mm² - for 5 mm pitch
1000 V - 12 A - 8kV - 2 - T110 - 2.5 mm² - for 10 mm pitch


Application values for end-use equipment have to be in accordance to norms and applicable to it.
The certifications of some product's versions could be pending, for more detailed and updated data
please refer to our web site www.sauro.net or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

Your drawings and notes

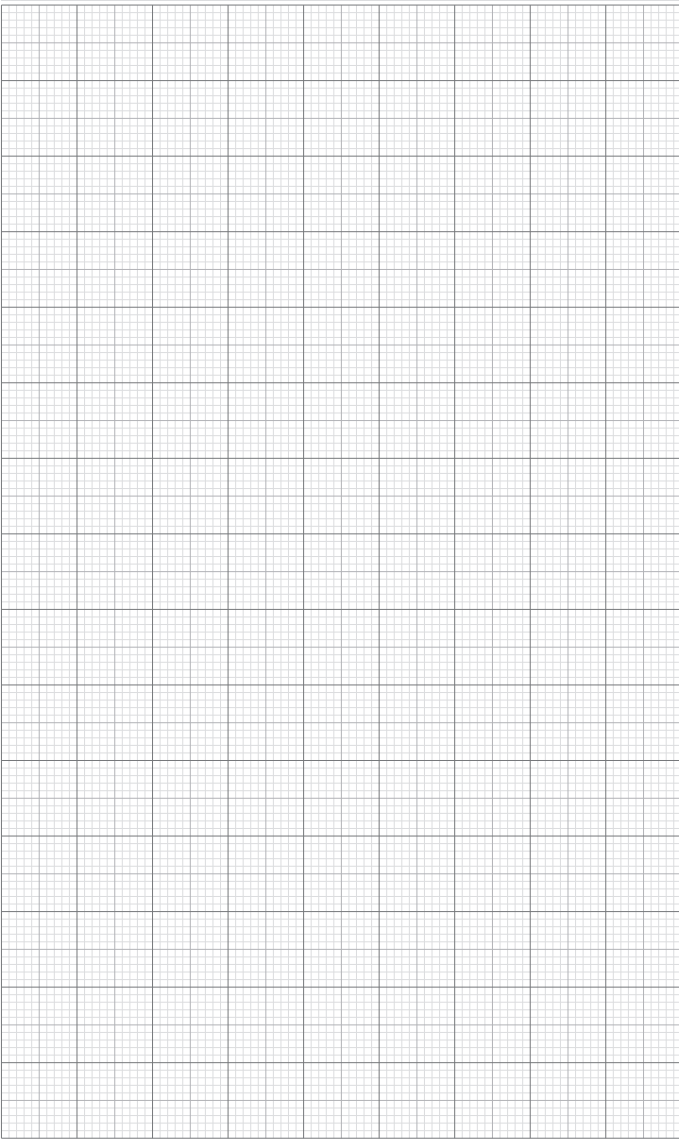


New

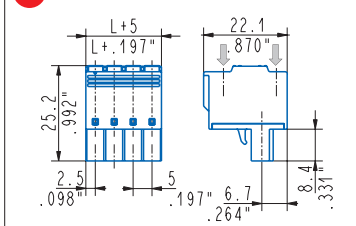

Side stackable, double, female
CCF_D01 - 2 ÷ 5 poles, 5 mm / .197" pitch
CCF_D02 - 2 ÷ 3 poles, 10 mm / .394" pitch

New

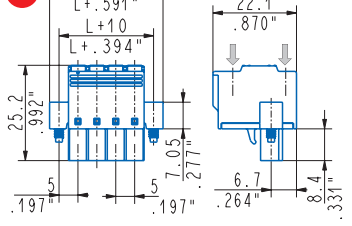

Locking screw flanges, double, female
CCF_DV1 - 2 ÷ 5 poles, 5 mm / .197" pitch
CCF_DV2 - 2 ÷ 3 poles, 10 mm / .394" pitch

Usable with:

CIM	CIMH	CPM high	CPM/CPMH	CRM	CIMH normo	CGM	CIF-LC1
Page 73	Page 75	Page 77	Page 78	Page 79	Page 80	Page 81	Page 84

