

#### General data

Dimensional class: medium Standard colour: green

Pitches: metric 5 mm, 10 mm (.197 in, .394 in) imperial 5.08 mm, 10.16 mm (.200 in, .400 in)

Stripping length: 10 mm (.39 in)

Operating temperature range:  $-40 \,^{\circ}\text{C} \div +105 \,^{\circ}\text{C} \,(-40 \,^{\circ}\text{F} \div +221 \,^{\circ}\text{F})$ 

### Certifications

# UL (n. E167473)

 $300\ V$  -  $12\ A$  -  $30\div12$  AWG stranded for 5 mm (.197 in), 5.08 mm (.200 in) pitch  $600\ V$  -  $12\ A$  -  $30\div12$  AWG stranded for 10 mm (.394 in) and 10.16 mm (.400 in) pitch


### Data according to


## IEC EN 61984

300~V - 12~A - 4kV - 2 - T110 -  $2.5~mm^2$  - for 5~mm and 5.08~mm pitch 1000~V - 12~A - 8kV - 2 - T110 -  $2.5~mm^2$  - for 10~mm and 10.16~mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager.

Please see "CONNECTORS COMBINATIONS"

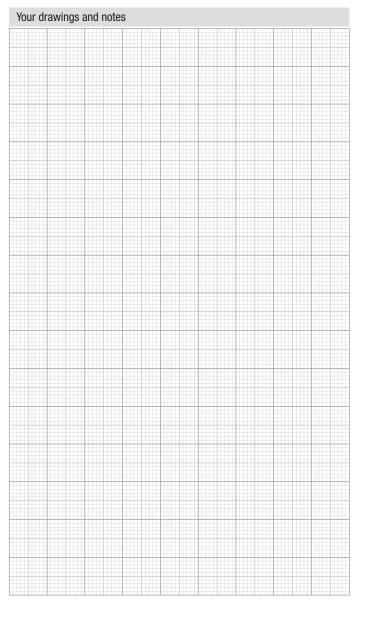

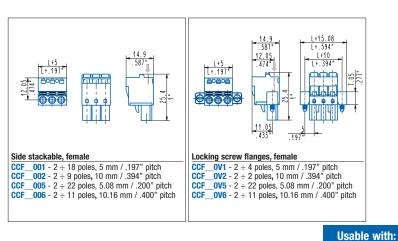

CIM	СІМН	CPM high	CPM/CPMH	CRM	CIMH normo	CGM	CIF-LC1
Page 73	Page 75	Page 77	Page 78	Page 79	Page 80	Page 81	Page 84
							*