
CHF DOUBLE

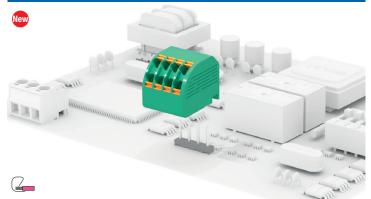

General data

Dimensional class: Standard colour: Pitches: Stripping length: Operating temperature range: Contact resistance: Insulation resistance: Insulating material group:

 $\begin{array}{l} \text{low} \\ \text{green} \\ \text{metric 3.5 mm, 7 mm (.138 in, .276 in)} \\ 10 \text{ mm (.394 in)} \\ -40 \ ^\circ\text{C} \ \div \ +105 \ ^\circ\text{C} \ (-40 \ ^\circ\text{F} \ \div \ +221 \ ^\circ\text{F}) \\ <15 \text{ m}\Omega \\ >10^\circ \Omega \ (500\text{V DC}) \\ \text{I} \ (\text{CTI} \ge \ 600\text{V}) \end{array}$

Data according to

UL 1059

150 V - 8 A - 24+16 AWG for 3.5 mm pitch 300 V - 8 A - 24+16 AWG for 7 mm pitch

IEC EN 61984

150 V - 8 A - 0.5 \div 1.5 mm² for 3.5 mm pitch 300 V - 8 A - 0.5 \div 1.5 mm² for 7 mm pitch

Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager

Please see "CONNECTORS COMBINATIONS"



Your drawings and notes

