
CIMH NORMO-ORTHOGONAL

STH® for reflow soldering



MSL1



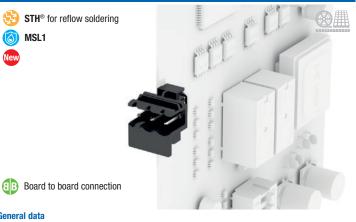

General data

Dimensional class: medium Standard colour: black

Pitches: metric 5 mm, (.197 in) PCB thickness: max 2.4 mm (.094 in) PCB hole diameter: min 1.6 mm (.063 in)

Operating temperature range: $-40 \, ^{\circ}\text{C} \div +105 \, ^{\circ}\text{C} \, (-40 \, ^{\circ}\text{F} \div +221 \, ^{\circ}\text{F})$

Contact resistance: <15 m Ω Insulation resistance: >10 9 Ω (500V DC) Insulating material group: $I (CTI \ge 600V)$

Certifications


UL (n. E167473) 300 V - 12 A


Application values for end-use equipment have to be in accordance to norms and applicable to it. The certifications of some product's versions could be pending, for more detailed and updated data please refer to our web site **www.sauro.net** or your representative Sales Manager.


Please see "CONNECTORS COMBINATIONS"

Connectors •



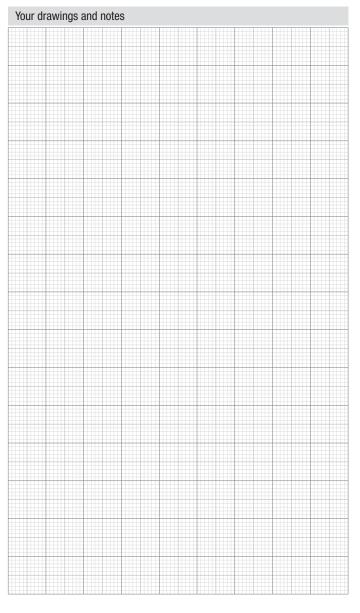





Usable with:

CIF	CVF	CCF	CCF double	CGF	CGFH
Page 67	Page 68	Page 69	Page 70	Page 71	Page 72











