



## Data sheet Product LA32\_

Cooling aggregates > Cooling aggregates with axial fan  
164,6 x 85 mm, with axial fan

### Features

width:	<b>164.6 mm</b>
height:	<b>85 mm</b>
length:	<b>100 mm / 150 mm / 200 mm / 250 mm / 300 mm</b>
thermal resistance:	<b>0.039 - 0.098 K/W</b>
surface:	<b>raw degreased aluminium</b>
operating voltage of the fan motor:	<ul style="list-style-type: none"> <li>• 12 V DC</li> <li>• 24 V DC</li> <li>• 48 V DC</li> </ul>

### Technical Drawing

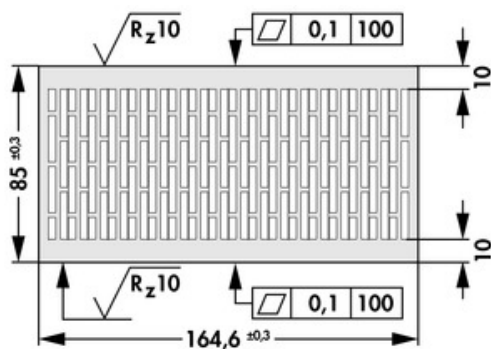

**Fan****ebmpapst 8212 JH4, 12 V DC**

type:	ebmpapst 8212 JH4
dimensions:	80x80x38 mm
tension:	12 V DC
power inout:	39 W
max. air volume:	222 m <sup>3</sup> /h
temperature range:	-20°C... +70°C
speed:	14,000 min <sup>-1</sup>
noise level:	71 dB(A)
weight:	200 g
failure rate (L <sub>10</sub> ):	L <sub>10</sub> > 50,000 h (40°C)

**ebmpapst 8214 JH4, 24 V DC**

type:	ebmpapst 8214 JH4
dimensions:	80x80x38 mm
tension:	24 V DC
power inout:	38 W
max. air volume:	222 m <sup>3</sup> /h
temperature range:	-20°C... +70°C
speed:	14,000 min <sup>-1</sup>
noise level:	71 dB(A)
weight:	200 g
failure rate (L <sub>10</sub> ):	L <sub>10</sub> > 50,000 h (40°C)

**ebmpapst 8218 JH4, 48 V DC**

type:	ebmpapst 8218 JH4
dimensions:	80x80x38 mm
tension:	48 V DC
power inout:	36 W
max. air volume:	222 m <sup>3</sup> /h
temperature range:	-20°C... +70°C
speed:	14,000 min <sup>-1</sup>
noise level:	71 dB(A)

weight:

**200 g**failure rate (L<sub>10</sub>):**L<sub>10</sub> > 50,000 h (40°C)****Fischer Elektronik GmbH & Co. KG**  
DEUTSCHLAND • GERMANY • ALLEMAGNENottebohmstraße 28  
58511 LüdenscheidTelefon +49 2351 435-0  
Telefax +49 2351 45754info@fischerelektronik.de  
www.fischerelektronik.de