


## Data sheet Product LA8\_

Cooling aggregates > Cooling aggregates with axial fan  
188 x 74 mm, with axial fan

### Features

width:	188 mm
height:	74 mm
length:	100 mm / 150 mm / 200 mm / 250 mm / 300 mm
thermal resistance:	0.075 - 0.03 K/W
surface:	<ul style="list-style-type: none"> <li>raw degreased aluminium</li> <li>mounting area(s) milled flat</li> </ul>
operating voltage of the fan motor:	<ul style="list-style-type: none"> <li>12 V DC</li> <li>24 V DC</li> </ul>

### Technical Drawing

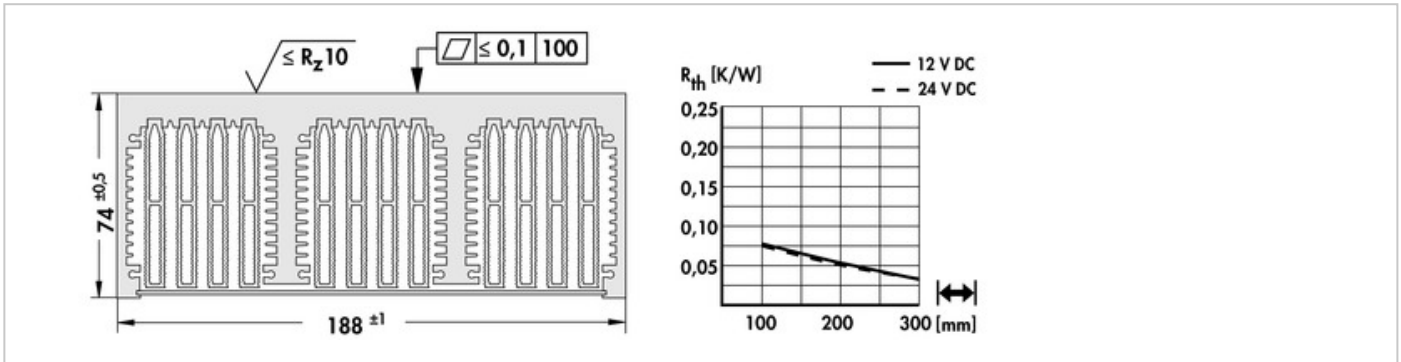

**Fan****ebmpapst, kugelgelagert, 12 V DC**

type:	<b>ebmpapst 612 NHH-118</b>
dimensions:	<b>60x60x25 mm</b>
tension:	<b>12 V DC</b>
power inout:	<b>2.9 W</b>
max. air volume:	<b>56 m<sup>3</sup>/h</b>
temperature range:	<b>-20°C... +70°C</b>
speed:	<b>6,800 min<sup>-1</sup></b>
noise level:	<b>41 dB(A)</b>
weight:	<b>66 g</b>
failure rate (L <sub>10</sub> ):	<b>L<sub>10</sub> &lt; 60,000 h (40°C)</b>

**ebmpapst, kugelgelagert, 24 V DC**

type:	<b>ebmpapst 614 NHH-119</b>
dimensions:	<b>60x60x25 mm</b>
tension:	<b>24 V DC</b>
power inout:	<b>2.9 W</b>
max. air volume:	<b>56 m<sup>3</sup>/h</b>
temperature range:	<b>-20°C... +70°C</b>
speed:	<b>6,850 min<sup>-1</sup></b>
noise level:	<b>41 dB(A)</b>
weight:	<b>66 g</b>
failure rate (L <sub>10</sub> ):	<b>L<sub>10</sub> &lt; 60,000 h (40°C)</b>