


Data sheet Product LA_V11_

Cooling aggregates > Cooling aggregates with axial fan
240 x 83 mm, with axial fan and air-flow chamber

Features

width:	240 mm
height:	83 mm
length:	100 mm / 150 mm / 200 mm / 250 mm / 300 mm
thermal resistance:	0.11 - 0.046 K/W
surface:	<ul style="list-style-type: none"> raw degreased aluminium mounting area(s) milled flat
operating voltage of the fan motor:	<ul style="list-style-type: none"> 24 V DC 230 V AC

Technical Drawing

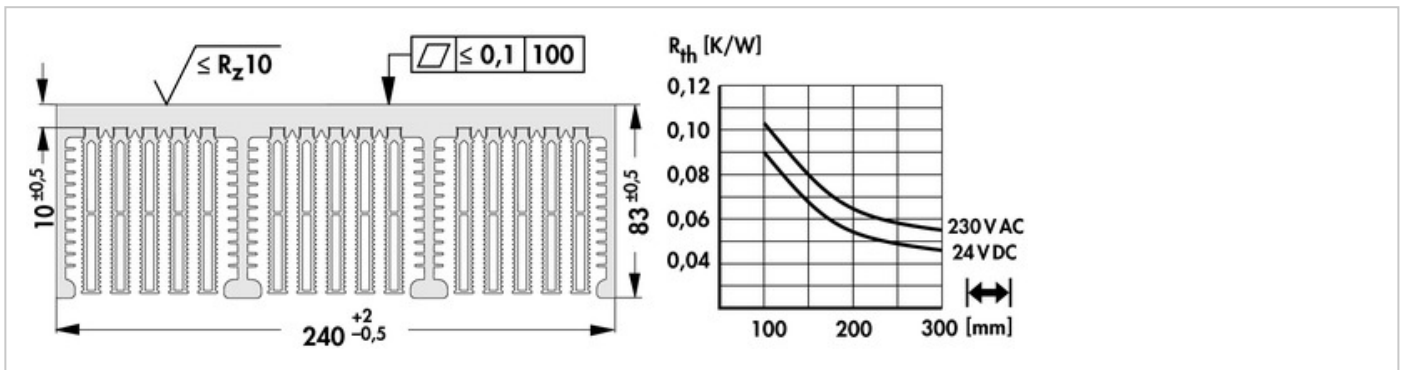

Fan**ebmpapst, kugelgelagert, 24 V DC**

type:	ebmpapst 8314H
dimensions:	80x80x32 mm
tension:	24 V DC
power inout:	6 W
max. air volume:	80 m³/h
temperature range:	-20°C... 75°C
speed:	5,000 min⁻¹
noise level:	48 dB(A)
weight:	170 g
failure rate (L ₁₀):	L₁₀ < 55,000 h (40°C)

ebmpapst, kugelgelagert, 230 V AC

type:	ebmpapst 8556N
dimensions:	80x80x38 mm
tension:	230 V AC
power inout:	12 W
max. air volume:	50 m³/h
temperature range:	-40°C... +90°C
speed:	2,800 min⁻¹
noise level:	31 dB(A)
weight:	490 g
failure rate (L ₁₀):	L₁₀ < 52,500 h (40°C)